

DM-300-1M

Standalone rotary adsorption air dryer



Casing in stainless steel

High performance desiccant rotor

PTC reactivation heater to eliminate the overheating risk

Adjustable air flow potentiometer


Reliability and simple maintenance



Technical specifications DM-300-1M

Dry air flow range :	from 180 to 300 m³/h
Nominal dry air flow : (static pressure available : 180 Pa)	300 m³/h
Dehumidification capacity (at 20°C and 60%RH) :	1,1 kg/h
Wet air flow : (static pressure available : 100 Pa)	50 m³/h
Electrical power :	1,3 kW - 230V

Capacity diagram

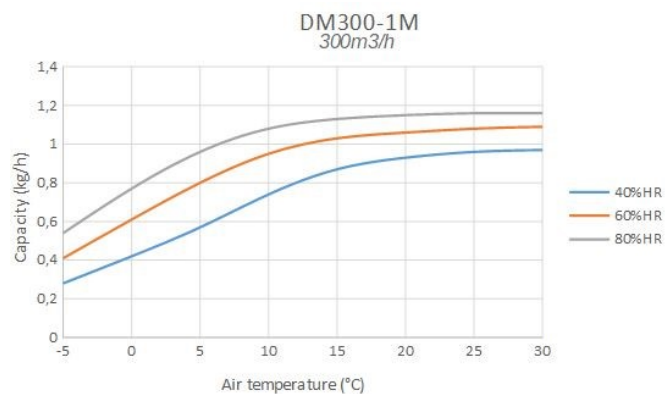

Example :

T_{AT} = Process air

T_{AS} = Dry air

DM-300-1M: [T_{AS} = T_{AT} + 0,12xT + 3,5] ±2°C


References

DM003	1M	1	0	0	0	A
Range & process air flow <i>DM : Product type + Flow P x 100</i> 003 : 300 m3/h	No of airfans + power supply 1 : 1 AF P + R M : Single phase	Handle 0 : Without 1 : With	Component configuration 0 : Without 1 : Pot AF P 5 : HM 6 : HM + Pot AF P	Mecanical configuration 0 : Without 1 : Connect PA	Configuration 0 : Without	Power supply mode A : P + N + T

AF : Air fan
HM : Hour meter
PA : Process air inlet
Pot : potentiometer

HM instead of ampermeter

Dimensions

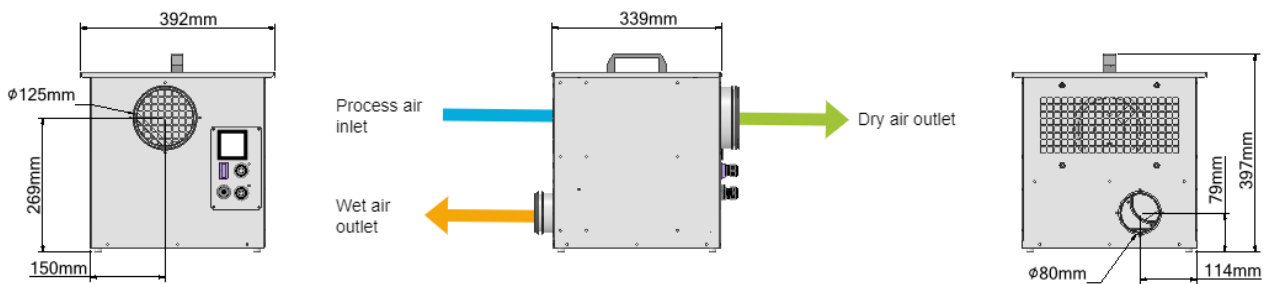

DM-04/23

This document is subject to change without notice.



Parc d'activités de Fétan - 605 allée Filiéristes - 01600 TREVOUX - France
 Tél. : +33 (0)4 74 08 44 44 - contact@dessica.fr
www.dessica.fr